

SASSO 100 round downlight

trimless exposed concrete

048-2700217M 048-2795210 002-90780



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed _____

rotation 360° _____

white , RAL9016 ¹ _____

Mounting set white aluminium _____

front IP44 , back IP20 _____

2130 lm _____

LED

3500 K _____

CRI ≥ 90 _____

L80 / 50000 h _____

initial MacAdam ≤ 2 SDCM _____

R_g: 99 , R_f: 90 , R₍₁₋₁₅₎: 89 _____

MR 0.7 _____

MDER 0.64 _____

Optical

medium _____

beam angle 33° _____

UGR < 19 _____

Electrical

non DIM _____

system 26.7 W _____

inset 22.7 W _____

36 Vf _____

650 mA _____

PC2 220-240V _____

system 80 lm/W² _____

inset 94 lm/W³ _____

Physical

trimless for exposed concrete ceiling _____

length 230 mm _____

width 230 mm _____


height 162 mm _____

2.58 kg _____


Cutout

recessed depth 80 mm _____

Light distribution



Product drawing

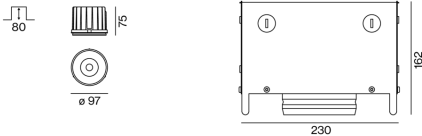

¹ RAL code

² incl. optical losses and the efficiency of the operating device (converter)

³ incl. optical losses

Installation instructions



Lighting calculator

