

SASSO 100 round downlight

trimless exposed concrete

048-2700217M 048-2795210 002-90780



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

rotation 360°

white , RAL 9016 ¹

Mounting set white aluminium

front IP44 , back IP20

2130 lm

fixture 94 lm/W²

LED

3500 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 99 , R_r: 90 , R_{t(1-15)}: 89

MR 0.7

MDER 0.64

Optical

medium

beam angle 33°

UGR ≤ 19

Electrical

non DIM

220-240 V

system 26.7 W

fixture 22.7 W

36 Vf

650 mA

PC2

Physical

trimless for exposed concrete ceiling

length 230 mm

width 230 mm


height 162 mm

2.58 kg


Cutout

recessed depth 80 mm

Light distribution



Product drawing

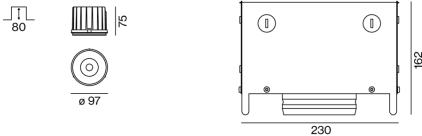

¹ RAL code
² incl. consideration of optical losses & internal control unit losses

Installation instructions



Lighting calculator

