

SASSO 100 round downlight

trimless

048-2700214S 048-2796117 002-90780



Project / Type	
Notes	
Count / Date	



--	--	--	--

General

Ceiling , Recessed
matt silver
Mounting set traffic white
front IP44 , back IP20
2100 lm
fixture 93 lm/W ¹

LED

3500 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R _g : 99 , R _f : 90 , R _{t(1-15)} : 89
MR 0.7
MDER 0.64

Optical

spot
beam angle 19°
UGR ≤ 13

Electrical

non DIM
220-240 V
system 26.7 W
fixture 22.7 W
36 Vf
650 mA
PC2

Physical


trimless
diameter 105 mm
height 75 mm
0.47 kg

Cutout


diameter 106 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 25 mm
recessed depth 80 mm

¹ incl. consideration of optical losses & internal control unit losses

Light distribution



Product drawing

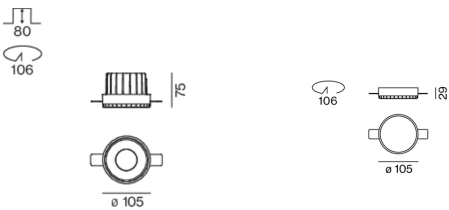

Installation instructions



Lighting calculator

