

SASSO 100 round downlight

trimless exposed concrete

048-2700214M 048-2795210 002-90780



Project / Type _____

Notes _____

Count / Date _____



360° rotation icon

220-240V icon

IP20 / IP44 icon

X-PERT icon

X-PERT icon

General

Ceiling , Recessed _____

rotation 360° _____

matt silver _____

Mounting set white aluminium _____

front IP44 , back IP20 _____

2110 lm _____

LED

3500 K _____

CRI ≥ 90 _____

L80 / 50000 h _____

initial MacAdam ≤ 2 SDCM _____

R_g: 99 , R_f: 90 , R₍₁₋₁₅₎: 89 _____

MR 0.7 _____

MDER 0.64 _____

Optical

medium _____

beam angle 33° _____

UGR < 16 , ≥65° <3000 cd/m² _____

Electrical

non DIM _____

system 26.7 W _____

inset 22.7 W _____

36 Vf _____

650 mA _____

PC2 220-240V _____

system 79 lm/W¹ _____

inset 93 lm/W² _____

Physical

trimless for exposed concrete ceiling _____

length 230 mm _____

width 230 mm _____


height 162 mm _____

2.58 kg _____


Cutout

recessed depth 80 mm _____

Light distribution



Product drawing

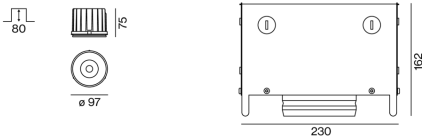

¹ incl. optical losses and the efficiency of the operating device (converter)

² incl. optical losses

Installation instructions



Lighting calculator

