

# SASSO 100 round downlight

trimless exposed concrete

048-2700211S 048-2795210 002-90780



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_



### General

Ceiling , Recessed \_\_\_\_\_

rotation 360° \_\_\_\_\_

black , RAL 9005 <sup>1</sup> \_\_\_\_\_

Mounting set white aluminium \_\_\_\_\_

front IP44 , back IP20 \_\_\_\_\_

1990 lm \_\_\_\_\_

fixture 88 lm/W<sup>2</sup> \_\_\_\_\_

### LED

3500 K \_\_\_\_\_

CRI ≥ 90 \_\_\_\_\_

L80 / 50000 h \_\_\_\_\_

initial MacAdam ≤ 2 SDCM \_\_\_\_\_

R<sub>g</sub>: 99 , R<sub>r</sub>: 90 , R<sub>t(1-15)</sub>: 89 \_\_\_\_\_

MR 0.7 \_\_\_\_\_

MDER 0.64 \_\_\_\_\_

### Optical

spot \_\_\_\_\_

beam angle 19° \_\_\_\_\_

UGR ≤ 13 , ≥65° <3000 cd/m<sup>2</sup> \_\_\_\_\_

### Electrical

non DIM \_\_\_\_\_

220-240 V \_\_\_\_\_

system 26.7 W \_\_\_\_\_

fixture 22.7 W \_\_\_\_\_

36 Vf \_\_\_\_\_

650 mA \_\_\_\_\_

PC2 \_\_\_\_\_

### Physical

trimless for exposed concrete ceiling \_\_\_\_\_

length 230 mm \_\_\_\_\_

width 230 mm \_\_\_\_\_

height 162 mm \_\_\_\_\_


2.58 kg \_\_\_\_\_

### Cutout


recessed depth 80 mm \_\_\_\_\_

<sup>1</sup> RAL code  
<sup>2</sup> incl. consideration of optical losses & internal control unit losses

### Light distribution



### Product drawing

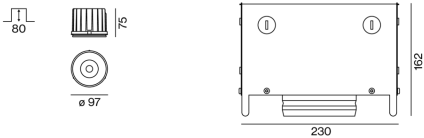

### Installation instructions



### Lighting calculator

