

# SASSO 100 round downlight

trimless exposed concrete

048-2700119M 048-2795210 002-90780



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_



## General

Ceiling , Recessed \_\_\_\_\_

rotation 360° \_\_\_\_\_

gold , RAL 260-M <sup>1</sup> \_\_\_\_\_

Mounting set white aluminium \_\_\_\_\_

front IP44 , back IP20 \_\_\_\_\_

2120 lm \_\_\_\_\_

fixture 93 lm/W<sup>2</sup> \_\_\_\_\_

## LED

4000 K \_\_\_\_\_

CRI ≥ 90 \_\_\_\_\_

L80 / 50000 h \_\_\_\_\_

initial MacAdam ≤ 2 SDCM \_\_\_\_\_

R<sub>g</sub>: 98 , R<sub>r</sub>: 90 , R<sub>t(1-5)</sub>: 88 \_\_\_\_\_

MR 0.8 \_\_\_\_\_

MDER 0.72 \_\_\_\_\_

## Optical

medium \_\_\_\_\_

beam angle 33° \_\_\_\_\_

UGR ≤ 16 , ≥65° <3000 cd/m<sup>2</sup> \_\_\_\_\_

## Electrical

non DIM \_\_\_\_\_

220-240 V \_\_\_\_\_

system 26.7 W \_\_\_\_\_

fixture 22.7 W \_\_\_\_\_

36 V<sub>f</sub> \_\_\_\_\_

650 mA \_\_\_\_\_

PC2 \_\_\_\_\_

## Physical

trimless for exposed concrete ceiling \_\_\_\_\_

length 230 mm \_\_\_\_\_

width 230 mm \_\_\_\_\_


height 162 mm \_\_\_\_\_

2.58 kg \_\_\_\_\_


## Cutout

recessed depth 80 mm \_\_\_\_\_

## Light distribution



## Product drawing

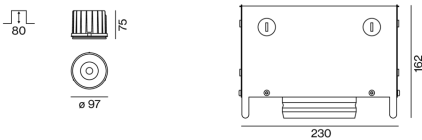

<sup>1</sup> RAL code  
<sup>2</sup> incl. consideration of optical losses & internal control unit losses

## Installation instructions



## Lighting calculator

