

SASSO 100 round downlight

trimless exposed concrete

048-2700117S 048-2795210 002-90780



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

rotation 360°

white , RAL9016 ¹

Mounting set white aluminium

front IP44 , back IP20

2170 lm

LED

4000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 98 , R_f: 90 , R₍₁₋₁₅₎: 88

MR 0.8

MDER 0.72

Optical

spot

beam angle 19°

UGR < 19

Electrical

non DIM

system 26.7 W

inset 22.7 W

36 V_f

650 mA

PC2 220-240V

system 81 lm/W²

inset 96 lm/W³

Physical

trimless for exposed concrete ceiling

length 230 mm

width 230 mm


height 162 mm

2.58 kg


Cutout

recessed depth 80 mm

Light distribution



Product drawing

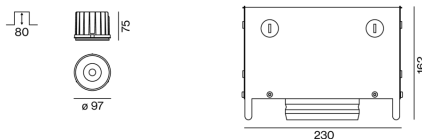

[048-2700117S 048-2795210 002-90780] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

25.11.2024

1 / 1