

# SASSO 100 round downlight

trimless exposed concrete

048-2700117F 048-2795210 002-90780



Project / Type

Notes

Count / Date



**General**

Ceiling , Recessed

rotation 360°

white , RAL9016 <sup>1</sup>

Mounting set white aluminium

front IP44 , back IP20

2410 lm

**LED**

4000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 98 , R<sub>f</sub>: 90 , R<sub>(1-15)</sub>: 88

MR 0.8

MDER 0.72

**Optical**

flood

beam angle 45°

UGR < 19

**Electrical**

non DIM

system 26.7 W

inset 22.7 W

36 Vf

650 mA

PC2 220-240V

system 90 lm/W<sup>2</sup>

inset 106 lm/W<sup>3</sup>

**Physical**

trimless for exposed concrete ceiling

length 230 mm

width 230 mm


height 162 mm

2.58 kg


**Cutout**

recessed depth 80 mm

## Light distribution



## Product drawing

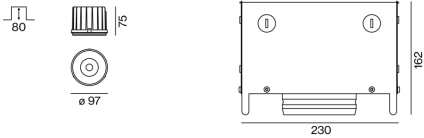

<sup>1</sup> RAL code

<sup>2</sup> incl. optical losses and the efficiency of the operating device (converter)

<sup>3</sup> incl. optical losses

## Installation instructions



## Lighting calculator

