

SASSO 100 round downlight

trimless exposed concrete

048-2700111W 048-2795210 002-90780



Project / Type _____

Notes _____

Count / Date _____



360° rotation

220-240V

IP20 / IP44

X-PERT

X-PERT

General

Ceiling , Recessed

rotation 360°

black , RAL9005 ¹

Mounting set white aluminium

front IP44 , back IP20

2380 lm

LED

4000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 98 , R_f: 90 , R₍₁₋₁₅₎: 88

MR 0.8

MDER 0.72

Optical

wide flood

beam angle 65°

≥65° <1500 cd/m²

Electrical

non DIM

system 26.7 W

inset 22.7 W

36 Vf

650 mA

PC2 220-240V

system 89 lm/W²

inset 105 lm/W³

Physical

trimless for exposed concrete ceiling

length 230 mm

width 230 mm


height 162 mm

2.58 kg


Cutout

recessed depth 80 mm

Light distribution



Product drawing

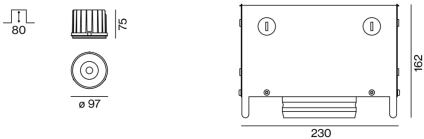

¹ RAL code

² incl. optical losses and the efficiency of the operating device (converter)

³ incl. optical losses

Installation instructions



Lighting calculator

