

SASSO 100 round downlight

trimless

048-2700114M 048-2796117 002-90780



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed _____

matt silver _____

Mounting set RAL Traffic white _____

front IP44 , back IP20 _____

2160 lm _____

LED

4000 K _____

CRI \geq 90 _____

L80 / 50000 h _____

initial MacAdam \leq 2 SDCM _____

R_g: 98 , R_r: 90 , R_{t(1-15)}: 88 _____

MR 0.8 _____

MDER 0.72 _____

Optical

medium _____

beam angle 33° _____

UGR < 16 , \geq 65° <3000 cd/m² _____

Electrical

non DIM _____

system 26.7 W _____

inset 22.7 W _____

36 Vf _____

650 mA _____

PC2 220-240V _____

system 81 lm/W¹ _____

inset 95 lm/W² _____

Physical

trimless _____

diameter 105 mm _____

height 75 mm _____

0.47 kg _____

Cutout

diameter 106 mm _____

min. ceiling thickness 12.5 mm _____


max. ceiling thickness 25 mm _____

recessed depth 80 mm _____


¹ incl. optical losses and the efficiency of the operating device (converter)

² incl. optical losses

Light distribution



Product drawing

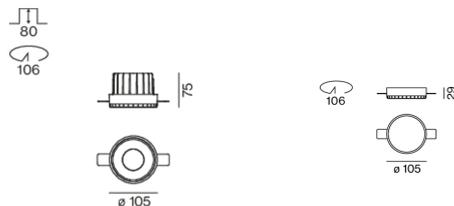

Installation instructions



Lighting calculator



SASSO 100 round downlight

trimless

048-2700114M 048-2796117 002-90780



Project / Type _____

Notes _____

Count / Date _____

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.964	0.923	0.884	0.847	0.811
LSF	1	1	1	1	1

MF LMF × RSMF × LLMF × LSF
 MF Maintenance Factor
 LMF^a Luminaire Maintenance Factor

RSMF^a Room Surface Maintenance Factor
 LLMF Lamp Lumens Maintenance Factor
 LSF Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	33
B16	53
B20	67
B25	83
C10	40
C16	64
C20	80
C25	100

Components

MOUNTING SET trimless

TYPE	COLOUR	Ø (MM)	ARTICLE NUMBER(S)
for plasterboard ceilings 12.5/15/25 mm	traffic white	105	048-2796117



CONVERTER

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
31 W	143-43-30	002-90780



Mounting accessories

PRIMED CONCRETE MOUNTING HOUSING

COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
white aluminium	614-307-120	048-2695110



Electrical accessories

THROUGH WIRING CONNECTION BOX

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
non DIM cable ø 4 – 12 mm	105-58-30	005-2531110
DALI cable ø 4 – 12 mm	105-58-30	005-2551110



Optional electrical accessories

DIN RAIL POWER SUPPLY

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
160 W	72-90-63	005-6520210



DIN RAIL LED DRIVER

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
DALI-2 200-1050 mA 2 x 42W	36-88-59	005-6121030



[048-2700114M 048-2796117 002-90780] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
 © XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

22.11.2024

SASSO 100 round downlight

trimless

048-2700114M 048-2796117 002-90780



Project / Type

Notes

Count / Date

Optical accessories

HONEYCOMB LOUVER

COLOUR
jet black

Ø (MM)
50

ARTICLE NUMBER(S)
007-1965598

