

SASSO 100 round downlight

trim

048-2700019W 048-2796317 002-90780



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

gold , RAL260-M ¹

Mounting set traffic white

front IP44 , back IP20

2340 lm

LED

3000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 99 , R_r: 90 , R_{t(1-15)}: 87

MR 0.6

MDER 0.54

Optical

wide flood

beam angle 66°

≥65° <1500 cd/m²

Electrical

non DIM

system 26.7 W

inset 22.7 W

36 Vf

650 mA

PC2 220-240V

system 88 lm/W²

inset 103 lm/W³

Physical

trim

diameter 118 mm

height 75 mm

0.45 kg

Cutout


diameter 108 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 80 mm

Light distribution



Product drawing

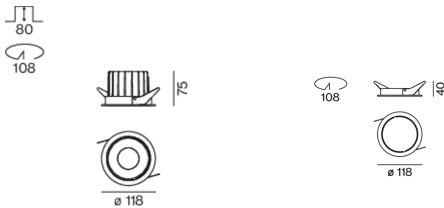

¹ RAL code
² incl. optical losses and the efficiency of the operating device (converter)
³ incl. optical losses

Installation instructions

Lighting calculator

