

SASSO 100 round downlight

trim

048-2700019F 048-279631G 002-90766



Project / Type

Notes

Count / Date



General

Ceiling , Recessed
gold , RAL260-M ¹
Mounting set white aluminium
front IP44 , back IP20
1650 lm

LED

3000 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R_g: 99 , R_r: 90 , R_{t1-15}: 87
MR 0.6
MDER 0.54

Optical

flood
beam angle 44°
UGR < 16 , ≥65° <3000 cd/m²
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical

non DIM
system 17.9 W
inset 15.2 W
36 V
450 mA
PC2 220-240V
system 92 lm/W³
inset 108 lm/W⁴


Physical

trim
diameter 118 mm
height 75 mm
0.47 kg


Cutout

diameter 108 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 80 mm

Light distribution



Product drawing

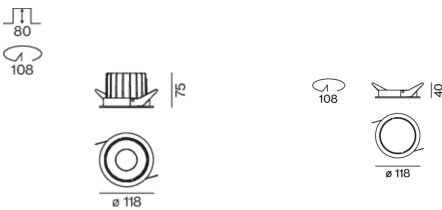

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)
⁴ incl. optical losses

Installation instructions



Lighting calculator

