

# SASSO 100 round downlight

trim

048-2700014S 048-279631G 002-90780



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_



220-240V

IP20  
IP44

X-PERT

X-PERT

## General

Ceiling , Recessed

matt silver

Mounting set white aluminium

front IP44 , back IP20

2060 lm

## LED

3000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 99 , R<sub>f</sub>: 90 , R<sub>t1-15</sub>: 87

MR 0.6

MDER 0.54

## Optical

spot

beam angle 19°

UGR < 13

## Electrical

non DIM

system 26.7 W

inset 22.7 W

36 Vf

650 mA

PC2 220-240V

system 77 lm/W<sup>1</sup>

inset 91 lm/W<sup>2</sup>

## Physical

trim

diameter 118 mm

height 75 mm

0.45 kg

## Cutout

diameter 108 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 80 mm


<sup>1</sup> incl. optical losses and the efficiency of the operating device (converter)

<sup>2</sup> incl. optical losses

## Light distribution



## Product drawing

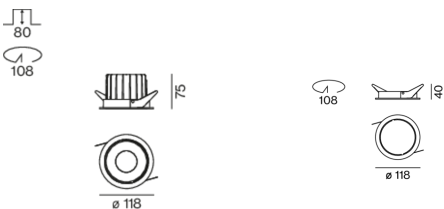

## Installation instructions



## Lighting calculator

