

# SASSO 100 round downlight

trimless exposed concrete

048-2700014S 048-2795210 002-90780



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_



<b>General</b>	
Ceiling , Recessed	_____
rotation 360°	_____
matt silver	_____
Mounting set white aluminium	_____
front IP44 , back IP20	_____
2060 lm	_____
fixture 91 lm/W <sup>1</sup>	_____

<b>LED</b>	
3000 K	_____
CRI ≥ 90	_____
L80 / 50000 h	_____
initial MacAdam ≤ 2 SDCM	_____
R <sub>g</sub> : 99 , R <sub>r</sub> : 90 , R <sub>t(1-15)</sub> : 87	_____
MR 0.6	_____
MDER 0.54	_____

<b>Optical</b>	
spot	_____
beam angle 19°	_____
UGR ≤ 13	_____


<b>Electrical</b>	
non DIM	_____
220-240 V	_____
system 26.7 W	_____
fixture 22.7 W	_____
36 Vf	_____
650 mA	_____
PC2	_____

<b>Physical</b>	
trimless for exposed concrete ceiling	_____
length 230 mm	_____
width 230 mm	_____
height 162 mm	_____
2.58 kg	_____


<b>Cutout</b>	
recessed depth 80 mm	_____

<sup>1</sup> incl. consideration of optical losses & internal control unit losses

## Light distribution



## Product drawing

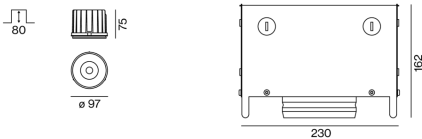

## Installation instructions



## Lighting calculator

