

SASSO 100 round downlight

trimless exposed concrete

048-2700011S 048-2795210 002-90780



Project / Type _____

Notes _____

Count / Date _____



General	
Ceiling , Recessed	_____
rotation 360°	_____
black , RAL 9005 ¹	_____
Mounting set white aluminium	_____
front IP44 , back IP20	_____
1940 lm	_____
fixture 86 lm/W ²	_____

LED	
3000 K	_____
CRI ≥ 90	_____
L80 / 50000 h	_____
initial MacAdam ≤ 2 SDCM	_____
R _g : 99 , R _r : 90 , R _{t(1-5)} : 87	_____
MR 0.6	_____
MDER 0.54	_____


Optical	
spot	_____
beam angle 19°	_____
UGR ≤ 13 , ≥65° <3000 cd/m ²	_____

Electrical	
non DIM	_____
220-240 V	_____
system 26.7 W	_____
fixture 22.7 W	_____
36 Vf	_____
650 mA	_____
PC2	_____


Physical	
trimless for exposed concrete ceiling	_____
length 230 mm	_____
width 230 mm	_____
height 162 mm	_____
2.58 kg	_____

Cutout	
recessed depth 80 mm	_____

Light distribution



Product drawing

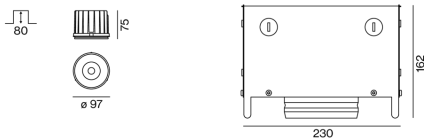

¹ RAL code
² incl. consideration of optical losses & internal control unit losses

Installation instructions



Lighting calculator

