

# SASSO 60 emergency light pro trim soft acoustic ceiling

048-2693231 048-2696397



Project / Type


Notes

Count / Date




Round LED emergency light inset; surface lacquered in black; 360° rotatable; installation without tools in mounting set due to patented ball catch system; round installation housing; with trim Signal white; for installation in soft acoustic ceilings; suitable for ceiling thickness of 25-40 mm; incl. 3 interchangeable lenses: anti panic / escape route / spot; incl. 3h rechargeable battery; Pro DALI with monitoring via DALI; light colour 6500 K; CRI ≥ 80; degree of protection IP20; PC2 220-240V; light source not replaceable;

## Light distribution

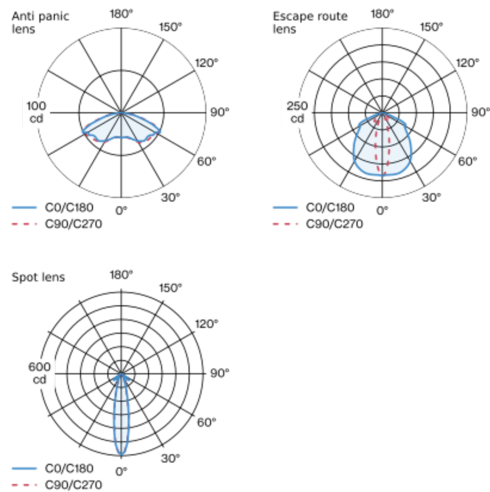

## Product drawing



## General

Ceiling , Recessed

rotation 360°

black , RAL9005 <sup>1</sup>

Signal white

IP20

206<sup>2</sup>, 208<sup>3</sup>, 217<sup>4</sup> lm

## LED

6500 K

CRI ≥ 80

## Optical

emergency light

beam angle 21°<sup>2</sup>, 103°x25°<sup>3</sup>, 149°x150°<sup>4</sup>

## Electrical

system 1.0 W

inset 1.0 W

200 mA

PC2 220-240V

system 206<sup>2</sup>, 208<sup>3</sup>, 217<sup>4</sup> lm/W<sup>5</sup>

inset 206<sup>2</sup>, 208<sup>3</sup>, 217<sup>4</sup> lm/W<sup>6</sup>

## Physical

with trim for acoustic ceiling

diameter 80 mm

height 94 mm

0.13 kg

## Cutout

diameter 74 mm

min. ceiling thickness 25 mm

max. ceiling thickness 40 mm

recessed depth 110 mm

<sup>1</sup> RAL code <sup>2</sup> Spot lens <sup>3</sup> Escape route lens <sup>4</sup> Anti panic lens  
<sup>5</sup> incl. optical losses and the efficiency of the operating device (converter)  
<sup>6</sup> incl. optical losses

## Installation instructions



## Lighting calculator

