

SASSO 60 emergency light

pro trimless soft acoustic ceiling

048-2693231 048-2696197



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

rotation 360°

black , RAL 9005 ¹

Mounting set signal white for acoustic ceilings

IP20

206², 208³, 217⁴ lm

LED

6500 K

CRI ≥ 80

Optical

emergency light

beam angle 21°², 103°x25°³, 149°x150°⁴

Electrical

220-240 V

system 1.0 W

system 206², 208³, 217⁴ lm/W⁵

PC2

Round LED emergency light inset; surface lacquered in black; 360° rotatable; installation without tools in mounting set due to patented ball catch system; round installation housing; signal white for acoustic ceilings; for trimless installation in soft acoustic ceilings; suitable for ceiling thickness of 25-40 mm; incl. 3 interchangeable lenses: anti panic / escape route / spot; incl. 3h rechargeable battery; Pro DALI with monitoring via DALI; light colour 6500 K; CRI ≥ 80; degree of protection IP20; PC2; light source not replaceable;

Physical


trimless for acoustic ceiling

diameter 80 mm


height 94 mm

0.32 kg

Light distribution

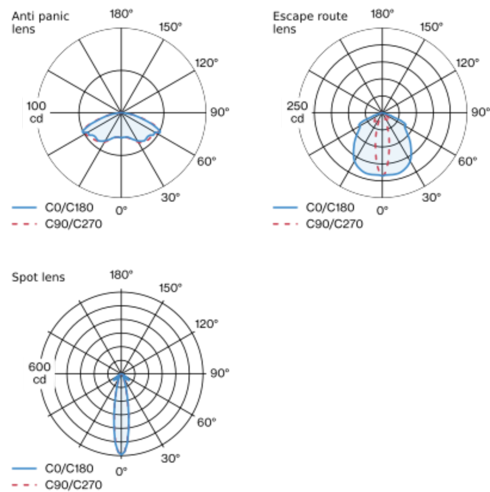

Product drawing



Cutout

diameter 74 mm

min. ceiling thickness 25 mm

max. ceiling thickness 40 mm

recessed depth 110 mm

¹ RAL code ² Spot lens ³ Escape route lens ⁴ Anti panic lens

⁵ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions

Lighting calculator

