

SASSO 60 emergency light

basic trim soft acoustic ceiling

048-2693211 048-2696397



Project / Type

Notes

Count / Date



General
Ceiling , Recessed
rotation 360°
black , RAL 9005 ¹
Mounting set signal white for acoustic ceilings
IP20
206 ² , 208 ³ , 217 ⁴ lm

LED
6500 K
CRI ≥ 80


Optical
emergency light
beam angle 21° ² , 103°x25° ³ , 149°x150° ⁴

Electrical
220-240 V
system 1.0 W
system 206 ² , 208 ³ , 217 ⁴ lm/W ⁵
PC2


Round LED emergency light inset; surface lacquered in black; 360° rotatable; installation without tools in mounting set due to patented ball catch system; round installation housing; with trim signal white for acoustic ceilings; for installation in soft acoustic ceilings; suitable for ceiling thickness of 25-40 mm; incl. 3 interchangeable lenses: anti panic / escape route / spot; incl. 3h rechargeable battery; with test button; light colour 6500 K; CRI ≥ 80; degree of protection IP20; PC2; light source not replaceable;

Physical
with trim for acoustic ceiling
diameter 80 mm
height 94 mm
0.27 kg

Light distribution

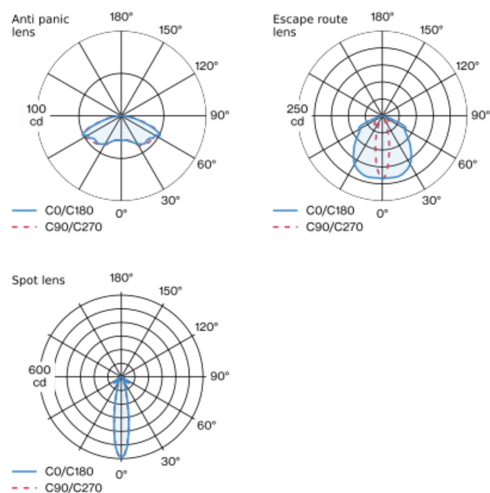

Product drawing



Cutout
diameter 74 mm
min. ceiling thickness 25 mm
max. ceiling thickness 40 mm
recessed depth 110 mm

¹ RAL code ² Spot lens ³ Escape route lens ⁴ Anti panic lens
⁵ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions

Lighting calculator



SASSO 60 emergency light

basic trim soft acoustic ceiling

048-2693211 048-2696397



Project / Type

Notes

Count / Date

Components

MOUNTING SET trim for soft acoustic ceilings

COLOUR	Ø (MM)	ARTICLE NUMBER(S)
signal white for acoustic ceilings	80	048-2696397



Mounting accessories

MOUNTING TOOL

COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
traffic black	77-77-35	048-2695918



Electrical accessories

REPLACEMENT ACCUPACK

TYPE	ARTICLE NUMBER(S)
3h battery life	048-2693910

