

SASSO 60 emergency light

basic trimless soft acoustic ceiling

048-2693211 048-2696197



Project / Type
Notes
Count / Date



General

Ceiling , Recessed
rotation 360°
black , RAL 9005 ¹
Mounting set signal white for acoustic ceilings
IP20
206 ² , 208 ³ , 217 ⁴ lm

LED

6500 K
CRI ≥ 80

Optical

emergency light
beam angle 21° ² , 103°x25° ³ , 149°x150° ⁴


Electrical

220-240 V
system 1.0 W
system 206 ² , 208 ³ , 217 ⁴ lm/W ⁵
PC2


Physical

trimless for acoustic ceiling
diameter 80 mm
height 94 mm
0.31 kg

Light distribution

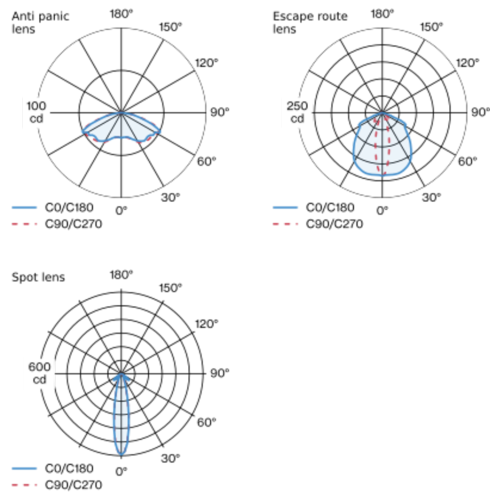

Product drawing



Cutout

diameter 74 mm
min. ceiling thickness 25 mm
max. ceiling thickness 40 mm
recessed depth 110 mm

¹ RAL code ² Spot lens ³ Escape route lens ⁴ Anti panic lens
⁵ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



Lighting calculator

