

# SASSO 100 square wallwasher

trimless

048-2750919A 048-2797117 002-90767



Project / Type

Notes

Count / Date



### General

Ceiling , Recessed

gold , RAL260-M <sup>1</sup>

Mounting set traffic white

IP20

1600 lm

### LED

2700 K

CRI ≥ 90

L85 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 101 , R<sub>f</sub>: 90 , R<sub>f(1-15)</sub>: 88

MR 0.51

MDER 0.46

### Optical

wallwasher

P<sub>stLM</sub> ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

### Electrical

DALI-2

system 18.6 W

inset 15.8 W

36 Vf

450 mA

PC2 220-240V

system 86 lm/W<sup>3</sup>

inset 101 lm/W<sup>4</sup>

### Physical

trimless

length 105 mm

width 105 mm

height 96 mm

0.72 kg

### Cutout

length 106 mm


width 106 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 120 mm

### Light distribution



### Product drawing

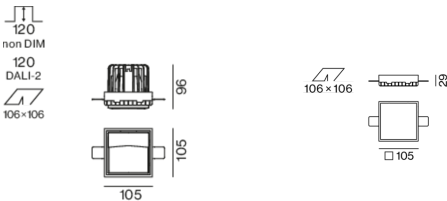

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)  
<sup>4</sup> incl. optical losses

### Installation instructions



### Lighting calculator

