

# SASSO 100 square wallwasher

trimless

048-2750911A 048-2797117 002-90767



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_



## General

Ceiling , Recessed \_\_\_\_\_

black , RAL9005 <sup>1</sup> \_\_\_\_\_

Mounting set traffic white \_\_\_\_\_

IP20 \_\_\_\_\_

1540 lm \_\_\_\_\_

## LED

2700 K \_\_\_\_\_

CRI ≥ 90 \_\_\_\_\_

L85 / 50000 h \_\_\_\_\_

initial MacAdam ≤ 3 SDCM \_\_\_\_\_

R<sub>g</sub>: 101 , R<sub>f</sub>: 90 , R<sub>f(1-15)</sub>: 88 \_\_\_\_\_

MR 0.51 \_\_\_\_\_

MDER 0.46 \_\_\_\_\_

## Optical

wallwasher \_\_\_\_\_

PstLM ≤ 1.0 <sup>2</sup> \_\_\_\_\_

SVM ≤ 0.4 <sup>2</sup> \_\_\_\_\_

## Electrical

DALI-2 \_\_\_\_\_

system 18.6 W \_\_\_\_\_

inset 15.8 W \_\_\_\_\_

36 Vf \_\_\_\_\_

450 mA \_\_\_\_\_

PC2 220-240V \_\_\_\_\_

system 83 lm/W<sup>3</sup> \_\_\_\_\_

inset 98 lm/W<sup>4</sup> \_\_\_\_\_

## Physical

trimless \_\_\_\_\_

length 105 mm \_\_\_\_\_

width 105 mm \_\_\_\_\_

height 96 mm \_\_\_\_\_

0.72 kg \_\_\_\_\_

## Cutout

length 106 mm \_\_\_\_\_


width 106 mm \_\_\_\_\_

min. ceiling thickness 2 mm \_\_\_\_\_


max. ceiling thickness 25 mm \_\_\_\_\_

recessed depth 120 mm \_\_\_\_\_

## Light distribution



## Product drawing

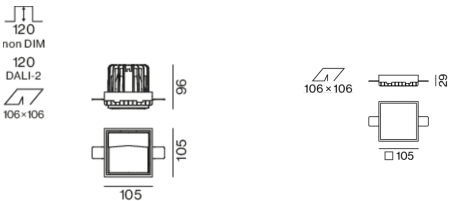

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)  
<sup>4</sup> incl. optical losses

## Installation instructions



## Lighting calculator

