

# SASSO 100 square wallwasher

trimless

048-2750211A 048-2797117 002-90789



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_



### General

Ceiling , Recessed \_\_\_\_\_

black , RAL9005 <sup>1</sup> \_\_\_\_\_

Mounting set traffic white \_\_\_\_\_

IP20 \_\_\_\_\_

2210 lm \_\_\_\_\_

### LED

3500 K \_\_\_\_\_

CRI ≥ 90 \_\_\_\_\_

L85 / 50000 h \_\_\_\_\_

initial MacAdam ≤ 3 SDCM \_\_\_\_\_

R<sub>g</sub>: 96 , R<sub>r</sub>: 90 , R<sub>t(1-15)</sub>: 91 \_\_\_\_\_

MR 0.74 \_\_\_\_\_

MDER 0.67 \_\_\_\_\_

### Optical

wallwasher \_\_\_\_\_

PstLM ≤ 1.0 <sup>2</sup> \_\_\_\_\_

SVM ≤ 0.4 <sup>2</sup> \_\_\_\_\_

### Electrical

DALI-2 \_\_\_\_\_

system 27.8 W \_\_\_\_\_

inset 23.7 W \_\_\_\_\_

36 Vf \_\_\_\_\_

650 mA \_\_\_\_\_

PC2 220-240V \_\_\_\_\_

system 79 lm/W<sup>3</sup> \_\_\_\_\_

inset 94 lm/W<sup>4</sup> \_\_\_\_\_

### Physical

trimless \_\_\_\_\_

length 105 mm \_\_\_\_\_

width 105 mm \_\_\_\_\_

height 96 mm \_\_\_\_\_

0.71 kg \_\_\_\_\_

### Cutout

length 106 mm \_\_\_\_\_


width 106 mm \_\_\_\_\_

min. ceiling thickness 2 mm \_\_\_\_\_


max. ceiling thickness 25 mm \_\_\_\_\_

recessed depth 120 mm \_\_\_\_\_

### Light distribution



### Product drawing

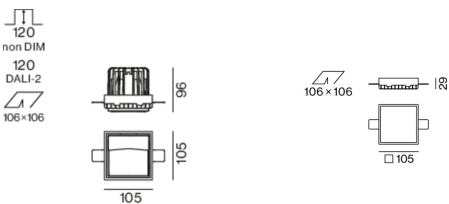

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)

<sup>4</sup> incl. optical losses

### Installation instructions



### Lighting calculator

