

# SASSO 100 square wallwasher

trimless

048-2750114A 048-2797117 002-90767



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed

matt silver

Mounting set traffic white

IP20

1830 lm

## LED

4000 K

CRI  $\geq$  90

L85 / 50000 h

initial MacAdam  $\leq$  3 SDCM

R<sub>g</sub>: 99 , R<sub>r</sub>: 92 , R<sub>r(1-15)</sub>: 90

MR 0.81

MDER 0.74

## Optical

wallwasher

PstLM  $\leq$  1.0 <sup>1</sup>

SVM  $\leq$  0.4 <sup>1</sup>

## Electrical

DALI-2

system 18.6 W

inset 15.8 W

36 Vf

450 mA

PC2 220-240V

system 98 lm/W<sup>2</sup>

inset 116 lm/W<sup>3</sup>

## Physical

trimless

length 105 mm

width 105 mm

height 96 mm

0.72 kg

## Cutout

length 106 mm

width 106 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 120 mm

Recessed square spotlight in die-cast aluminium; 1 lamp; surface matt silver; installation without tools in mounting set due to patented ball catch system; square installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 4000 K; binning initial MacAdam  $\leq$  3 SDCM; CRI  $\geq$  90; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2 220-240V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

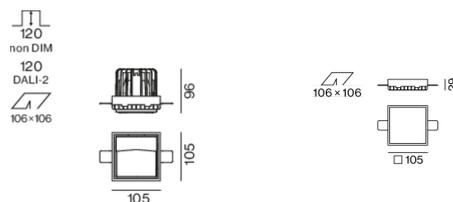

<sup>1</sup> Value of containing product at full load (undimmed)

<sup>2</sup> incl. optical losses and the efficiency of the operating device (converter)

<sup>3</sup> incl. optical losses

## Installation instructions



## Lighting calculator

