

SASSO 100 square wallwasher

trimless


048-2750017A 048-2797117 002-90789



Project / Type

Notes

Count / Date

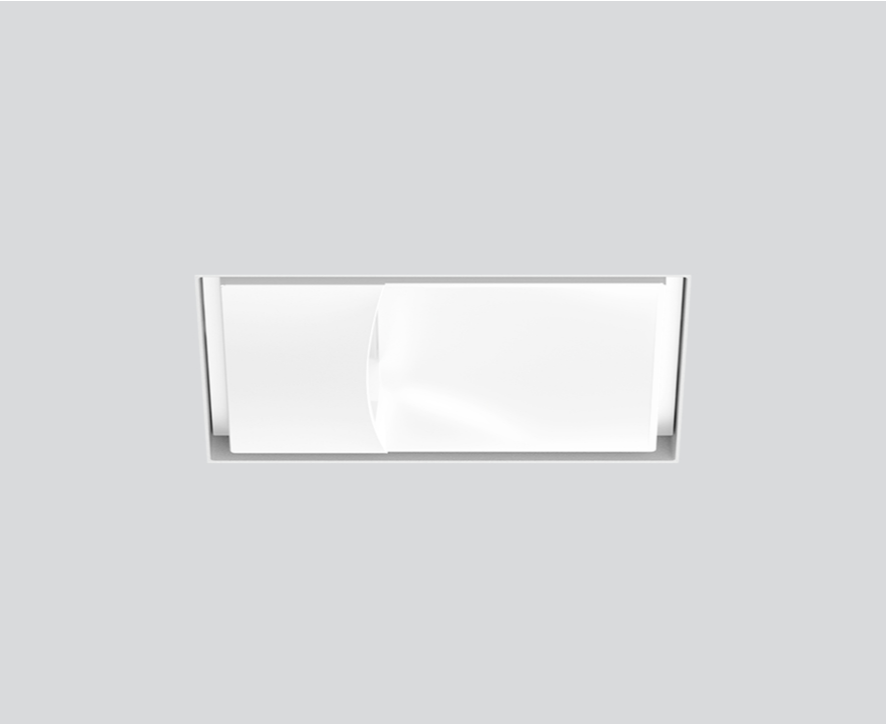

General

Ceiling , Recessed

white , RAL9016 ¹

Mounting set traffic white

IP20

2420 lm

LED

3000 K

CRI ≥ 90

L85 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 99 , R_f: 91 , R₍₁₋₁₅₎: 89

MR 0.61

MDER 0.55

Optical

wallwasher

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

DALI-2

system 27.8 W

inset 23.7 W

36 Vf

650 mA

PC2 220-240V

system 87 lm/W³

inset 102 lm/W⁴

Physical

trimless

length 105 mm

width 105 mm

height 96 mm

0.71 kg

Cutout

length 106 mm

width 106 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 120 mm

¹ RAL code ² Value of containing product at full load (undimmed)


³ incl. optical losses and the efficiency of the operating device (converter)

⁴ incl. optical losses

Light distribution



Product drawing

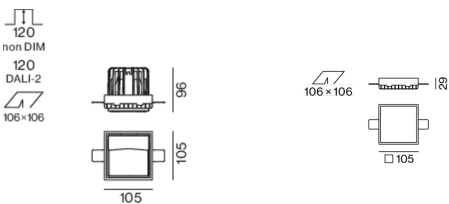

Installation instructions



Lighting calculator



[‘048-2750017A 048-2797117 002-90789’] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com