

SASSO 100 round wallwasher

trim

048-2740219A 048-2796318 002-90789



Project / Type

Notes

Count / Date



General
Ceiling , Recessed
rotation 360°
gold , RAL 260-M ¹
Mounting set jet black
IP20
2230 lm
fixture 94 lm/W ²


LED
3500 K
CRI ≥ 90
L85 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 96 , R _r : 90 , R _{t(1-5)} : 91
MR 0.74
MDER 0.67

Optical
wallwasher
PstLM ≤ 1.0 ³
SVM ≤ 0.4 ³


Round recessed spotlight in die-cast aluminium; 1 lamp; surface gold; 360° rotatable; installation without tools in mounting set due to patented ball catch system; round installation housing; with trim jet black; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3500 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2; 220-240 V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Electrical
DALI-2
220-240 V
system 27.8 W
fixture 23.7 W
36 Vf
650 mA
PC2

Light distribution



Product drawing

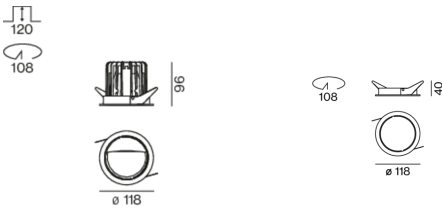

Physical
trim
diameter 118 mm
height 96 mm
0.69 kg

Cutout
diameter 108 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 120 mm

¹ RAL code
² incl. consideration of optical losses & internal control unit losses
³ Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator

