

SASSO 100 round wallwasher

trim

048-2740217A 048-279631G 002-90767



Project / Type

Notes

Count / Date



General
Ceiling , Recessed
rotation 360°
white , RAL 9016 ¹
Mounting set white aluminium
IP20
1720 lm
fixture 109 lm/W ²

LED
3500 K
CRI ≥ 90
L85 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 96 , R _r : 90 , R _{t(1-5)} : 91
MR 0.74
MDER 0.67


Optical
wallwasher
PstLM ≤ 1.0 ³
SVM ≤ 0.4 ³

Electrical
DALI-2
220-240 V
system 18.6 W
fixture 15.8 W
36 Vf
450 mA
PC2


Physical
trim
diameter 118 mm
height 96 mm
0.7 kg

Cutout
diameter 108 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 120 mm

Light distribution



Product drawing

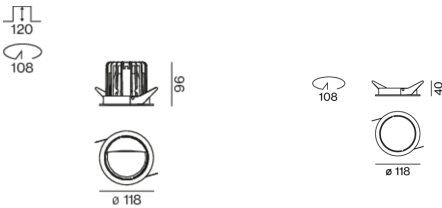

¹ RAL code
² incl. consideration of optical losses & internal control unit losses
³ Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator



[048-2740217A 048-279631G 002-90767] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com