

# SASSO 100 round wallwasher

trim

048-2740019A 048-2796317 002-90767



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed

rotation 360°

gold , RAL260-M<sup>1</sup>

Mounting set traffic white

IP20

1620 lm

## LED

3000 K

CRI ≥ 90

L85 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 99 , R<sub>f</sub>: 91 , R<sub>(1-15)</sub>: 89

MR 0.61

MDER 0.55

## Optical

wallwasher

PstLM ≤ 1.0<sup>2</sup>

SVM ≤ 0.4<sup>2</sup>

## Electrical

DALI-2

system 18.6 W

inset 15.8 W

36 Vf

450 mA

PC2 220-240V

system 87 lm/W<sup>3</sup>

inset 103 lm/W<sup>4</sup>

## Physical

trim

diameter 118 mm

height 96 mm

0.7 kg

## Cutout

diameter 108 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 120 mm

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)


<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)

<sup>4</sup> incl. optical losses

## Light distribution



## Product drawing

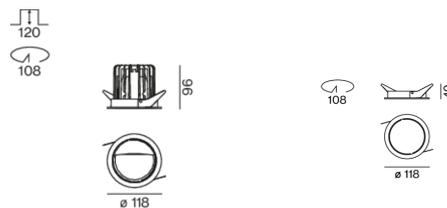

## Installation instructions



## Lighting calculator



[048-2740019A 048-2796317 002-90767] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

22.11.2024

1 / 1