

# SASSO 100 round adjustable

trim 2 lamps

048-2720919M 048-279831G 002-90767



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed

tilt max 30°

rotation 360°

gold , RAL 260-M<sup>1</sup>

Mounting set white aluminium

front IP40 , back IP20

2780 lm

fixture 91 lm/W<sup>2</sup>

## LED

2700 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 97 , R<sub>f</sub>: 91 , R<sub>{1-15}</sub>: 87

MR 0.52

MDER 0.47

## Optical

medium

beam angle 32°

UGR ≤ 16 , ≥65° <3000 cd/m<sup>2</sup>

PstLM ≤ 1.0<sup>3</sup>

SVM ≤ 0.4<sup>3</sup>

## Electrical

DALI-2

220-240 V

system 35 W

fixture 15.2 W

36 Vf

450 mA

fixture 30 W

PC2

1 DALI Addr.

## Physical

trim

length 218 mm

width 118 mm

height 95 mm

0.6 kg

## Cutout

diameter 105 mm

length 205 mm

width 105 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 100 mm

<sup>1</sup> RAL code


<sup>2</sup> incl. consideration of optical losses & internal control unit losses

<sup>3</sup> Value of containing product at full load (undimmed)

## Light distribution



## Product drawing

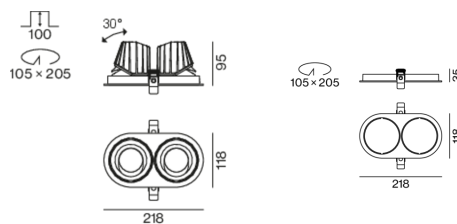

# SASSO 100 round adjustable

trim 2 lamps

048-2720919M 048-279831G 002-90767



Project / Type

Notes

Count / Date

Installation instructions



Lighting calculator

