

SASSO 100 round adjustable trimless soft acoustic ceiling

048-2720911M 048-2796117 002-90789




Project / Type	
Notes	
Count / Date	





Round recessed spotlight in die-cast aluminium; 1 lamp; surface black; 360° rotatable and 30° tiltable; installation without tools in mounting set due to patented ball catch system; round installation housing; traffic white; for trimless installation in soft acoustic ceilings; suitable for ceiling thickness of 25-40 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90 ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 33° beam; UGR ≤ 16 ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 3000 cd/m²; degree of protection from below IP40 (from above IP20); PC2 220-240V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

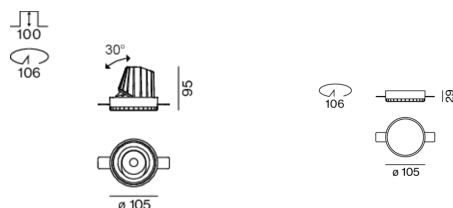

General

Ceiling , Recessed
tilt max 30°
rotation 360°
black , RAL9005 ¹
Mounting set Signal white
front IP40 , back IP20
1880 lm

LED

2700 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R _g : 97 , R _r : 91 , R ₍₁₋₁₅₎ : 87
MR 0.52
MDER 0.47

Optical

medium
beam angle 33°
UGR < 16 , $\geq 65^\circ < 3000$ cd/m ²
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical

DALI-2
system 26.7 W
inset 22.7 W
36 Vf
650 mA
PC2 220-240V
system 70 lm/W ³
inset 83 lm/W ⁴
1 DALI Addr.

Physical

trimless for acoustic ceiling
diameter 114 mm
height 95 mm
0.52 kg

Cutout

diameter 106 mm
min. ceiling thickness 25 mm
max. ceiling thickness 40 mm
recessed depth 100 mm

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)
⁴ incl. optical losses

SASSO 100 round
adjustable trimless soft
acoustic ceiling

048-2720911M 048-2796117 002-90789



Project / Type

Notes

Count / Date

Installation
instructions



Lighting
calculator

