

SASSO 100 round adjustable trimless soft acoustic ceiling

048-2720219W 048-2796117 002-90767



Project / Type	
Notes	
Count / Date	



General

Ceiling , Recessed
tilt max 30°
rotation 360°
gold , RAL260-M ¹
Traffic black
front IP40 , back IP20
1720 lm

LED

3500 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R _g : 99 , R _r : 90 , R _{t(1-15)} : 89
MR 0.7
MDER 0.64

Optical

wide flood
beam angle 60°
≥65° <1500 cd/m ²
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical

DALI-2
system 17.9 W
inset 15.2 W
36 Vf
450 mA
PC2 220-240V
system 96 lm/W ³
inset 113 lm/W ⁴
1 DALI Addr.

Physical


trimless for acoustic ceiling
diameter 114 mm
height 95 mm
0.53 kg

Cutout


diameter 106 mm
min. ceiling thickness 25 mm
max. ceiling thickness 40 mm
recessed depth 100 mm

Round recessed spotlight in die-cast aluminium; 1 lamp; surface gold; 360° rotatable and 30° tiltable; installation without tools in mounting set due to patented ball catch system; round installation housing; traffic white; for trimless installation in soft acoustic ceilings; suitable for ceiling thickness of 25-40 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3500 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 60° beam; degree of protection from below IP40 (from above IP20); PC2 220-240V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

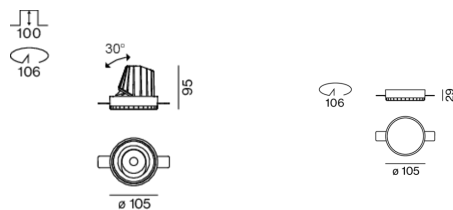

[048-2720219W 048-2796117 002-90767] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

22.11.2024

SASSO 100 round
adjustable trimless soft
acoustic ceiling

048-2720219W 048-2796117 002-90767



Project / Type

Notes

Count / Date

Installation
instructions



Lighting
calculator

