

SASSO 100 round adjustable trimless soft acoustic ceiling

048-2720214F 048-2796117 002-90789



Project / Type _____
 Notes _____
 Count / Date _____



General

Ceiling , Recessed _____
 tilt max 30° _____
 rotation 360° _____
 matt silver _____
 Signal white _____
 front IP40 , back IP20 _____
 2370 lm _____

LED

3500 K _____
 CRI ≥ 90 _____
 L80 / 50000 h _____
 initial MacAdam ≤ 2 SDCM _____
 R_g: 99 , R_r: 90 , R_{t(1-15)}: 89 _____
 MR 0.7 _____
 MDER 0.64 _____

Optical

flood _____
 beam angle 45° _____
 UGR < 16 , ≥65° <3000 cd/m² _____
 PstLM ≤ 1.0¹ _____
 SVM ≤ 0.4¹ _____

Electrical

DALI-2 _____
 system 26.7 W _____
 inset 22.7 W _____
 36 Vf _____
 650 mA _____
 PC2 220-240V _____
 system 89 lm/W² _____
 inset 104 lm/W³ _____
 1 DALI Addr. _____

Physical


trimless for acoustic ceiling _____
 diameter 114 mm _____
 height 95 mm _____
 0.52 kg _____

Cutout


diameter 106 mm _____
 min. ceiling thickness 25 mm _____
 max. ceiling thickness 40 mm _____
 recessed depth 100 mm _____

Round recessed spotlight in die-cast aluminium; 1 lamp; surface matt silver; 360° rotatable and 30° tiltable; installation without tools in mounting set due to patented ball catch system; round installation housing; Traffic black; for trimless installation in soft acoustic ceilings; suitable for ceiling thickness of 25-40 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3500 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 45° beam; UGR ≤ 16; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 3000 cd/m²; degree of protection from below IP40 (from above IP20); PC2 220-240V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

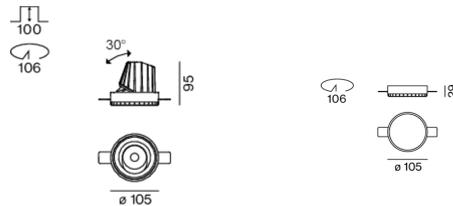

¹ Value of containing product at full load (undimmed)
² incl. optical losses and the efficiency of the operating device (converter)
³ incl. optical losses

SASSO 100 round adjustable trimless soft acoustic ceiling

048-2720214F 048-2796117 002-90789



Project / Type

Notes

Count / Date

**Installation
instructions**



**Lighting
calculator**



SASSO 100 round adjustable trimless soft acoustic ceiling

048-2720214F 048-2796117 002-90789



Project / Type _____
 Notes _____
 Count / Date _____

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.964	0.923	0.884	0.847	0.811
LSF	1	1	1	1	1

MF LMF × RSMF × LLMF × LSF
 MF Maintenance Factor
 LMF^a Luminaire Maintenance Factor

RSMF^a Room Surface Maintenance Factor
 LLMF Lamp Lumens Maintenance Factor
 LSF Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	18
B16	30
C10	23
C16	36

Components

MOUNTING SET trimless

TYPE	COLOUR	Ø (MM)	ARTICLE NUMBER(S)
for plasterboard ceilings 12.5/15/25 mm	traffic white	105	048-2796117



POWER SUPPLY

L-W-H (MM)	ARTICLE NUMBER(S)
143-43-30	002-90789



Mounting accessories

PRIMED CONCRETE MOUNTING HOUSING

COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
white aluminium	614-307-120	048-2695110



Electrical accessories

THROUGH WIRING CONNECTION BOX

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
non DIM cable ø 4 – 12 mm	105-58-30	005-253110
DALI cable ø 4 – 12 mm	105-58-30	005-255110



Optional electrical accessories

DIN RAIL POWER SUPPLY

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
160 W	72-90-63	005-6520210



DIN RAIL LED DRIVER

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
DALI-2 200-1050 mA 2 x 42W	36-88-59	005-6121030



[048-2720214F 048-2796117 002-90789] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

22.11.2024

3 / 4

SASSO 100 round adjustable trimless soft acoustic ceiling

048-2720214F 048-2796117 002-90789



Project / Type

Notes

Count / Date

Optical accessories

HONEYCOMB LOUVER

COLOUR
jet black

Ø (MM)
50

ARTICLE NUMBER(S)
007-1965598

