

# SASSO 100 round adjustable

trimless exposed concrete


048-2720111F 048-2795210 002-90789



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_



## General

Ceiling , Recessed  
 tilt max 30°  
 rotation 360°  
 black , RAL9005 <sup>1</sup>  
 Mounting set white aluminium  
 front IP40 , back IP20  
 2320 lm

## LED

4000 K  
 CRI ≥ 90  
 L80 / 50000 h  
 initial MacAdam ≤ 2 SDCM  
 R<sub>g</sub>: 98 , R<sub>r</sub>: 90 , R<sub>t(1-15)</sub>: 88  
 MR 0.8  
 MDER 0.72

## Optical

flood  
 beam angle 45°  
 UGR < 16 , ≥65° <3000 cd/m<sup>2</sup>  
 PstLM ≤ 1.0 <sup>2</sup>  
 SVM ≤ 0.4 <sup>2</sup>

## Electrical

DALI-2  
 system 26.7 W  
 inset 22.7 W  
 36 Vf  
 650 mA  
 PC2 220-240V  
 system 87 lm/W<sup>3</sup>  
 inset 102 lm/W<sup>4</sup>  
 1 DALI Addr.

## Physical


trimless for exposed concrete ceiling  
 length 230 mm  
 width 230 mm  
 height 162 mm  
 2.62 kg

## Cutout


recessed depth 100 mm

Round recessed spotlight in die-cast aluminium; 1 lamp; surface black; 360° rotatable and 30° tiltable; installation without tools in mounting set due to patented ball catch system; concrete housings for exposed concrete ceilings; for trimless installation; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 45° beam; UGR ≤ 16; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 3000 cd/m<sup>2</sup>; degree of protection from below IP40 (from above IP20); PC2 220-240V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

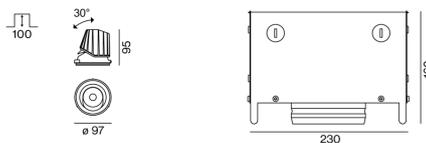

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)

<sup>4</sup> incl. optical losses

## Installation instructions



## Lighting calculator



[048-2720111F 048-2795210 002-90789] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

23.11.2024