

# SASSO 100 square downlight

trim 2 lamps

048-2710211M 048-2799318 002-90789



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed

black , RAL9005 <sup>1</sup>

Mounting set jet black

front IP44 , back IP20

4060 lm

## LED

3500 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 99 , R<sub>r</sub>: 90 , R<sub>t(1-15)</sub>: 89

MR 0.7

MDER 0.64

## Optical

medium

beam angle 33°x34°

UGR < 16 , ≥65° <3000 cd/m<sup>2</sup>

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

## Electrical

DALI-2

system 52 W

inset 22.7 W

36 V<sub>f</sub>

650 mA

total insets 45 W

PC2 220-240V

system 78 lm/W<sup>3</sup>

inset 90 lm/W<sup>4</sup>

1 DALI Addr.

## Physical

trim

length 218 mm

width 118 mm

height 75 mm

0.59 kg

## Cutout

length 210 mm

width 112 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 100 mm

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)


<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)

<sup>4</sup> incl. optical losses

## Light distribution



## Product drawing

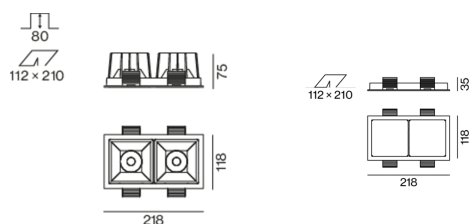

# SASSO 100 square downlight

trim 2 lamps

048-2710211M 048-2799318 002-90789



Project / Type

Notes

Count / Date

Installation  
instructions



Lighting  
calculator

