

SASSO 100 round downlight

trimless

048-2700911S 048-2796117 002-90789



Project / Type	
Notes	
Count / Date	



220-240V	IP20 IP44	X-PERT	X-PERT
----------	--------------	--------	--------

General

Ceiling , Recessed
black , RAL9005 ¹
Mounting set traffic white
front IP44 , back IP20
1870 lm

LED

2700 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R _g : 97 , R _f : 91 , R _{f(1-15)} : 87
MR 0.52
MDER 0.47

Optical

spot
beam angle 19°
UGR < 13 , ≥65° <3000 cd/m ²
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical

DALI-2
system 26.7 W
inset 22.7 W
36 Vf
650 mA
PC2 220-240V
system 70 lm/W ³
inset 82 lm/W ⁴
1 DALI Addr.

Physical

trimless
diameter 105 mm
height 75 mm
0.52 kg


Cutout

diameter 106 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 25 mm
recessed depth 80 mm


¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)
⁴ incl. optical losses

Round recessed spotlight in die-cast aluminium; 1 lamp; surface black; installation without tools in mounting set due to patented ball catch system; round installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 19° beam; UGR ≤ 13; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 3000 cd/m²; degree of protection from below IP44 (from above IP20); PC2 220-240V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

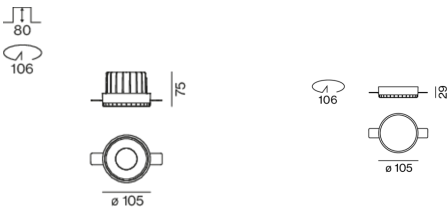

Installation instructions



Lighting calculator

