

# SASSO 100 round downlight

trim

048-2700217W 048-279631G 002-90789



Project / Type

Notes

Count / Date



### General

Ceiling , Recessed

white , RAL9016 <sup>1</sup>

Mounting set white aluminium

front IP44 , back IP20

2420 lm

### LED

3500 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 99 , R<sub>r</sub>: 90 , R<sub>t(1-15)</sub>: 89

MR 0.7

MDER 0.64

### Optical

wide flood

beam angle 66°

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

### Electrical

DALI-2

system 26.7 W

inset 22.7 W

36 Vf

650 mA

PC2 220-240V

system 91 lm/W<sup>3</sup>

inset 106 lm/W<sup>4</sup>

1 DALI Addr.

### Physical

trim

diameter 118 mm

height 75 mm

0.49 kg

### Cutout

diameter 108 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 80 mm

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)


<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)

<sup>4</sup> incl. optical losses

### Light distribution



### Product drawing

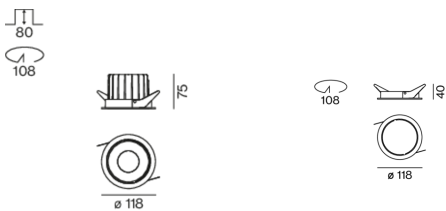

### Installation instructions



### Lighting calculator

