

SASSO 100 round downlight

trim 2 lamps


048-2700211M 048-279831G 002-90789



Project / Type

Notes

Count / Date

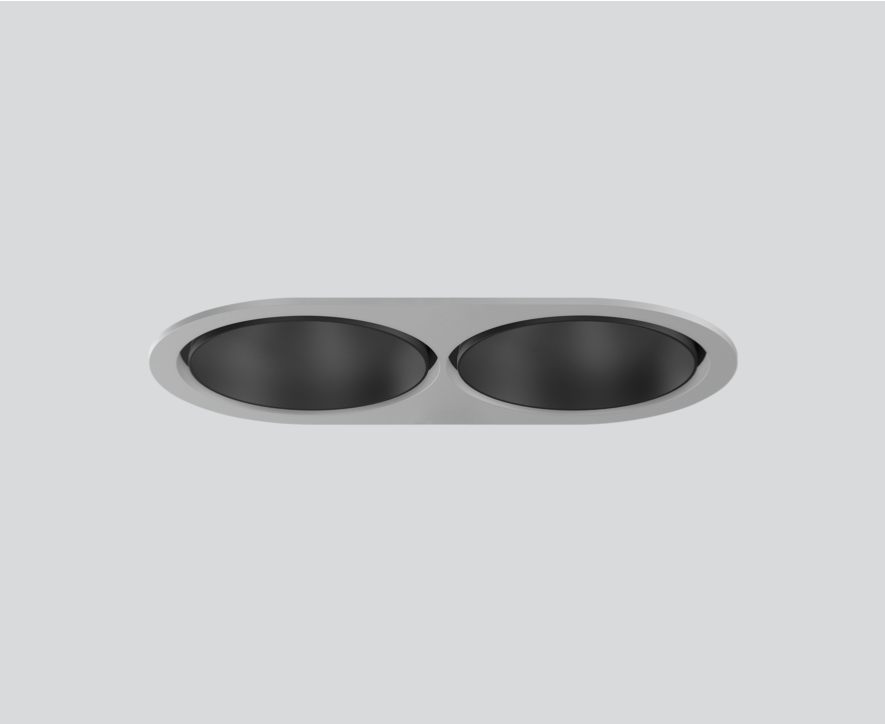

General

Ceiling , Recessed
black , RAL9005 ¹
Mounting set white aluminium
front IP44 , back IP20
3960 lm

LED

3500 K
CRI \geq 90
L80 / 50000 h
initial MacAdam \leq 2 SDCM
R_g: 99 , R_r: 90 , R_{t1-15}: 89
MR 0.7
MDER 0.64

Optical

medium
beam angle 33°
UGR < 16 , $\geq 65^\circ$ < 3000 cd/m²
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical

DALI-2
system 52 W
inset 22.7 W
36 Vf
650 mA
total insets 45 W
PC2 220-240V
system 76 lm/W³
inset 87 lm/W⁴
1 DALI Addr.

Physical


trim
length 218 mm
width 118 mm
height 75 mm
0.59 kg

Cutout


diameter 105 mm
length 205 mm
width 105 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 100 mm

Round recessed spotlight in die-cast aluminium; 2 lamps; surface black; installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3500 K; binning initial MacAdam \leq 2 SDCM; CRI \geq 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 33° beam; UGR \leq 16; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° \leq 3000 cd/m²; degree of protection from below IP44 (from above IP20); PC2 220-240V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

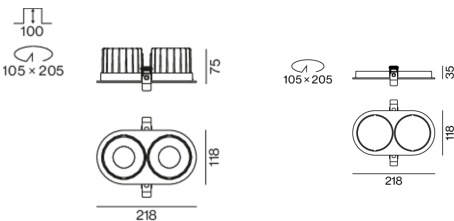

[048-2700211M 048-279831G 002-90789] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

22.11.2024

SASSO 100 round downlight

trim 2 lamps

048-2700211M 048-279831G 002-90789



Project / Type

Notes

Count / Date

Installation
instructions



Lighting
calculator

