

SASSO 100 round downlight

trim 2 lamps

048-2700119S 048-2798317 002-90767



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

gold , RAL260-M ¹

Mounting set traffic white

front IP44 , back IP20

3080 lm

LED

4000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 98 , R_r: 90 , R_{t(1-15)}: 88

MR 0.8

MDER 0.72

Optical

spot

beam angle 19°

UGR < 13 , $\geq 65^\circ$ < 3000 cd/m²

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

DALI-2

220-240 V

system 35 W

inset 15.2 W

36 Vf

450 mA

total insets 30 W

PC2

system 88 lm/W³

inset 101 lm/W³

1 DALI Addr.

Physical

trim

length 218 mm

width 118 mm

height 75 mm

0.61 kg

Cutout

diameter 105 mm

length 205 mm

width 105 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 100 mm


¹ RAL code ² Value of containing product at full load (undimmed)

³ incl. optical losses and the efficiency of the operating device (converter)

Light distribution



Product drawing

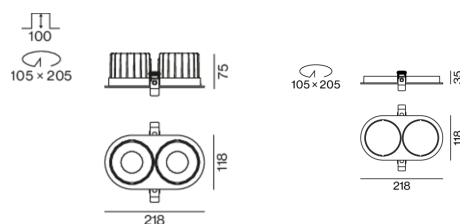

SASSO 100 round
downlight

trim 2 lamps

048-2700119S 048-2798317 002-90767



Project / Type

Notes

Count / Date

Installation
instructions



Lighting
calculator

