

SASSO 100 round downlight

trimless exposed concrete

048-2700114W 048-2795210 002-90767



Project / Type _____

Notes _____

Count / Date _____



Rotation: 360°

Voltage: 220-240V

Protection: IP20, IP44

Light source: X-PERT

General

Ceiling , Recessed _____

rotation 360° _____

matt silver _____

Mounting set white aluminium _____

front IP44 , back IP20 _____

1810 lm _____

LED

4000 K _____

CRI \geq 90 _____

L80 / 50000 h _____

initial MacAdam \leq 2 SDCM _____

R_g: 98 , R_f: 90 , R₍₁₋₁₅₎: 88 _____

MR 0.8 _____

MDER 0.72 _____

Optical

wide flood _____

beam angle 65° _____

$\geq 65^\circ$ < 1500 cd/m² _____

PstLM \leq 1.0 ¹ _____

SVM \leq 0.4 ¹ _____

Electrical

DALI-2 _____

system 17.9 W _____

inset 15.2 W _____

36 Vf _____

450 mA _____

PC2 220-240V _____

system 101 lm/W² _____

inset 119 lm/W³ _____

1 DALI Addr. _____

Physical

trimless for exposed concrete ceiling _____

length 230 mm _____

width 230 mm _____

height 162 mm _____


2.63 kg _____

Cutout


recessed depth 80 mm _____

Round recessed spotlight in die-cast aluminium; 1 lamp; surface matt silver; installation without tools in mounting set due to patented ball catch system; concrete housings for exposed concrete ceilings; for trimless installation; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam \leq 2 SDCM; CRI \geq 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 65° beam; degree of protection from below IP44 (from above IP20); PC2 220-240V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

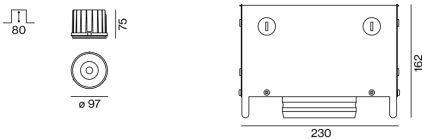

¹ Value of containing product at full load (undimmed)

² incl. optical losses and the efficiency of the operating device (converter)

³ incl. optical losses

Installation instructions



Lighting calculator

