

# SASSO 100 round downlight

trim

048-2700114M 048-279631G 002-90789



Project / Type	
Notes	
Count / Date	



220-240V	IP20 IP44	X-PERT	X-PERT
----------	--------------	--------	--------

### General

Ceiling , Recessed
matt silver
Mounting set white aluminium
front IP44 , back IP20
2160 lm

### LED

4000 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R <sub>g</sub> : 98 , R <sub>f</sub> : 90 , R <sub>t(1-15)</sub> : 88
MR 0.8
MDER 0.72

### Optical

medium
beam angle 33°
UGR < 16 , ≥65° <3000 cd/m <sup>2</sup>
PstLM ≤ 1.0 <sup>1</sup>
SVM ≤ 0.4 <sup>1</sup>

### Electrical

DALI-2
system 26.7 W
inset 22.7 W
36 V <sub>f</sub>
650 mA
PC2 220-240V
system 81 lm/W <sup>2</sup>
inset 95 lm/W <sup>3</sup>
1 DALI Addr.

### Physical

trim
diameter 118 mm
height 75 mm
0.49 kg


### Cutout

diameter 108 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 80 mm


<sup>1</sup> Value of containing product at full load (undimmed)  
<sup>2</sup> incl. optical losses and the efficiency of the operating device (converter)  
<sup>3</sup> incl. optical losses

Round recessed spotlight in die-cast aluminium; 1 lamp; surface matt silver; installation without tools in mounting set due to patented ball catch system; round installation housing; with trim white aluminium; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 33° beam; UGR ≤ 16; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 3000 cd/m<sup>2</sup>; degree of protection from below IP44 (from above IP20); PC2 220-240V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

### Light distribution



### Product drawing

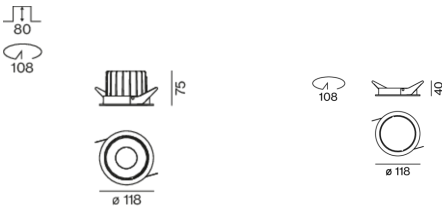

### Installation instructions



### Lighting calculator

