

# SASSO 100 round downlight

trim

048-2700017W 048-2796318 002-90767



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

white , RAL 9016 <sup>1</sup>

Mounting set jet black

front IP44 , back IP20

1710 lm

fixture 113 lm/W<sup>2</sup>

LED

3000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 99 , R<sub>f</sub>: 90 , R<sub>(1-15)</sub>: 87

MR 0.6

MDER 0.54

Optical

wide flood

beam angle 66°

PstLM ≤ 1.0 <sup>3</sup>

SVM ≤ 0.4 <sup>3</sup>

Electrical

DALI-2

220-240 V

system 17.9 W

fixture 15.2 W

36 Vf

450 mA

PC2

1 DALI Addr.

Physical

trim

diameter 118 mm

height 75 mm

0.5 kg

Cutout

diameter 108 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 80 mm

<sup>1</sup> RAL code


<sup>2</sup> incl. consideration of optical losses & internal control unit losses

<sup>3</sup> Value of containing product at full load (undimmed)

## Light distribution



## Product drawing

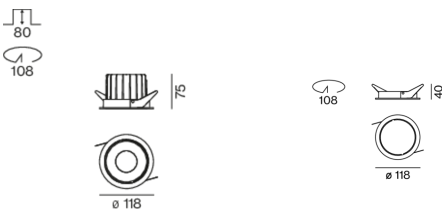

## Installation instructions



## Lighting calculator

