

# SASSO 100 round downlight

trim 2 lamps

048-2700014F 048-2798317 002-90767



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed  
matt silver  
Mounting set traffic white  
front IP44 , back IP20  
3360 lm

## LED

3000 K  
CRI  $\geq 90$   
L80 / 50000 h  
initial MacAdam  $\leq 2$  SDCM  
 $R_g: 99, R_r: 90, R_{t(1-15)}: 87$   
MR 0.6  
MDER 0.54

## Optical

flood  
beam angle  $44^\circ$   
UGR  $< 16, \geq 65^\circ < 3000 \text{ cd/m}^2$   
PstLM  $\leq 1.0^1$   
SVM  $\leq 0.4^1$

## Electrical

DALI-2  
system 35 W  
inset 15.2 W  
36 Vf  
450 mA  
total insets 30 W  
PC2 220-240V  
system 96 lm/W<sup>2</sup>  
inset 110 lm/W<sup>3</sup>  
1 DALI Addr.

## Physical


trim  
length 218 mm  
width 118 mm  
height 75 mm  
0.61 kg

## Cutout


diameter 105 mm  
length 205 mm  
width 105 mm  
min. ceiling thickness 2 mm  
max. ceiling thickness 25 mm  
recessed depth 100 mm

Round recessed spotlight in die-cast aluminium; 2 lamps; surface matt silver; installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim traffic white; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with  $44^\circ$  beam; UGR  $\leq 16$ ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above  $65^\circ \leq 3000 \text{ cd/m}^2$ ; degree of protection from below IP44 (from above IP20); PC2 220-240V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

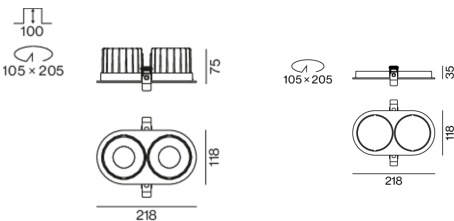

[048-2700014F 048-2798317 002-90767] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of  $\pm 10\%$ , those for the electrical connected load are initially subject to a tolerance of  $\pm 10\%$ , and those for the colour temperature are initially subject to a tolerance of  $\pm 150 \text{ K}$ . No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.  
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · [www.xal.com](http://www.xal.com)

22.11.2024

# SASSO 100 round downlight

trim 2 lamps

048-2700014F 048-2798317 002-90767



Project / Type

Notes

Count / Date

Installation  
instructions



Lighting  
calculator

