

# SASSO 100 round downlight

trim 2 lamps

048-2700011W 048-2798317 002-90767



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed  
black , RAL9005 <sup>1</sup>  
Mounting set traffic white  
front IP44 , back IP20  
3300 lm

## LED

3000 K  
CRI  $\geq 90$   
L80 / 50000 h  
initial MacAdam  $\leq 2$  SDCM  
 $R_g: 99$  ,  $R_r: 90$  ,  $R_{t(1-15)}: 87$   
MR 0.6  
MDER 0.54

## Optical

wide flood  
beam angle 65°  
 $\geq 65^\circ < 1500 \text{ cd/m}^2$   
 $\text{PstLM} \leq 1.0$  <sup>2</sup>  
 $\text{SVM} \leq 0.4$  <sup>2</sup>

## Electrical

DALI-2  
system 35 W  
inset 15.2 W  
36 Vf  
450 mA  
total insets 30 W  
PC2 220-240V  
system 94 lm/W<sup>3</sup>  
inset 109 lm/W<sup>4</sup>  
1 DALI Addr.

## Physical

trim  
length 218 mm  
width 118 mm  
height 75 mm  
0.61 kg


## Cutout

diameter 105 mm  
length 205 mm  
width 105 mm  
min. ceiling thickness 2 mm  
max. ceiling thickness 25 mm  
recessed depth 100 mm




Round recessed spotlight in die-cast aluminium; 2 lamps; surface black; installation without tools in mounting set due to patented ball catch system; oval installation housing; with trim traffic white; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 65° beam; degree of protection from below IP44 (from above IP20); PC2 220-240V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

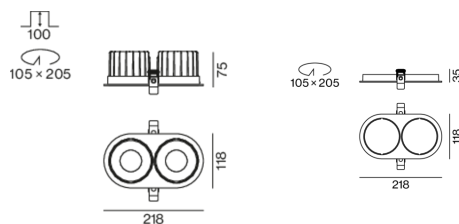

[048-2700011W 048-2798317 002-90767] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.  
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

21.11.2024

# SASSO 100 round downlight

trim 2 lamps

048-2700011W 048-2798317 002-90767



Project / Type

Notes

Count / Date

Installation  
instructions



Lighting  
calculator

