

# SASSO 40 round adjustable

trim

048-2820619S 048-2896317 002-90753




Project / Type	
Notes	
Count / Date	




Round recessed spotlight in die-cast aluminium; surface gold; 360° rotatable and 30° tiltable; installation without tools in mounting set due to patented ball catch system; round installation housing; with trim traffic white; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 14° beam; UGR  $\leq 10$ ; degree of protection from below IP40 (from above IP20); PC2; 220-240 V; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

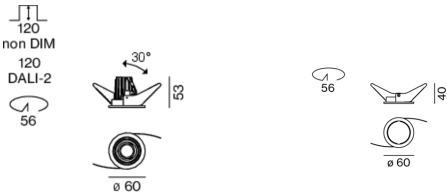

## General

Ceiling , Recessed	
tilt max 30°	
rotation 360°	
gold , RAL 260-M <sup>1</sup>	
Mounting set traffic white	
front IP40 , back IP20	
404 lm	
fixture 79 lm/W <sup>2</sup>	

## LED

4000 K	
CRI $\geq 90$	
L85 / 50000 h	
initial MacAdam $\leq 3$ SDCM	
R <sub>g</sub> : 94 , R <sub>f</sub> : 87 , R <sub>[1-15]</sub> : 90	
MR 0.86	
MDER 0.78	

## Optical

spot	
beam angle 14°	
UGR $\leq 10$	
PstLM $\leq 1.0$ <sup>3</sup>	
SVM $\leq 0.4$ <sup>3</sup>	

## Electrical

DALI-2	
220-240 V	
system 6.2 W	
fixture 5.1 W	
12 Vf	
450 mA	
PC2	

## Physical

trim	
diameter 60 mm	
height 50 mm	
0.21 kg	

## Cutout

diameter 56 mm	
min. ceiling thickness 2 mm	
max. ceiling thickness 25 mm	
recessed depth 120 mm	

<sup>1</sup> RAL code  
<sup>2</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.  
<sup>3</sup> Value of containing product at full load (undimmed)



# SASSO 40 round adjustable

trim

048-2820619S 048-2896317 002-90753



Project / Type

Notes

Count / Date

Installation instructions



Lighting calculator

