

# SASSO 40 round adjustable

trim

048-2820614M 048-2896318 002-90753



Project / Type \_\_\_\_\_


Notes \_\_\_\_\_

Count / Date \_\_\_\_\_




Round recessed spotlight in die-cast aluminium; surface matt silver; 360° rotatable and 30° tiltable; installation without tools in mounting set due to patented ball catch system; round installation housing; with trim jet black; suitable for ceiling thickness of 2-25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 28° beam; UGR ≤ 16; degree of protection from below IP40 (from above IP20); PC2 220-240V; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

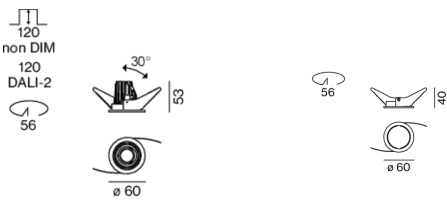

## General

Ceiling , Recessed \_\_\_\_\_

tilt max 30° \_\_\_\_\_

rotation 360° \_\_\_\_\_

matt silver \_\_\_\_\_

Mounting set jet black \_\_\_\_\_

front IP40 , back IP20 \_\_\_\_\_

378 lm \_\_\_\_\_

## LED

4000 K \_\_\_\_\_

CRI ≥ 90 \_\_\_\_\_

L85 / 50000 h \_\_\_\_\_

initial MacAdam ≤ 3 SDCM \_\_\_\_\_

R<sub>g</sub>: 94 , R<sub>r</sub>: 87 , R<sub>(1-15)</sub>: 90 \_\_\_\_\_

MR 0.86 \_\_\_\_\_

MDER 0.78 \_\_\_\_\_

## Optical

medium \_\_\_\_\_

beam angle 28° \_\_\_\_\_

UGR < 16 \_\_\_\_\_

PstLM ≤ 1.0 <sup>1</sup> \_\_\_\_\_

SVM ≤ 0.4 <sup>1</sup> \_\_\_\_\_

## Electrical

DALI-2 \_\_\_\_\_

system 6.2 W \_\_\_\_\_

inset 5.1 W \_\_\_\_\_

12 Vf \_\_\_\_\_

450 mA \_\_\_\_\_

PC2 220-240V \_\_\_\_\_

system 61 lm/W<sup>2</sup> \_\_\_\_\_

inset 74 lm/W<sup>3</sup> \_\_\_\_\_

## Physical

trim \_\_\_\_\_

diameter 60 mm \_\_\_\_\_

height 50 mm \_\_\_\_\_

0.2 kg \_\_\_\_\_

## Cutout

diameter 56 mm \_\_\_\_\_

min. ceiling thickness 2 mm \_\_\_\_\_

max. ceiling thickness 25 mm \_\_\_\_\_

recessed depth 120 mm \_\_\_\_\_

<sup>1</sup> Value of containing product at full load (undimmed)

<sup>2</sup> incl. optical losses and the efficiency of the operating device (converter)

<sup>3</sup> incl. optical losses



# SASSO 40 round adjustable

trim

048-2820614M 048-2896318 002-90753



Project / Type

Notes

Count / Date

Installation instructions



Lighting calculator



# SASSO 40 round adjustable

trim

048-2820614M 048-2896318 002-90753



Project / Type

Notes

Count / Date

## Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.95	0.92	0.89	0.86
LSF	1	1	1	1	1
MF	LMF × RSMF × LLMF × LSF		RSMF <sup>a</sup>	Room Surface Maintenance Factor	
MF	Maintenance Factor		LLMF	Lamp Lumens Maintenance Factor	
LMF <sup>a</sup>	Luminaire Maintenance Factor		LSF	Lamp Survival Faktor	

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B13	134
B16	166
B20	207
C13	224
C16	282
C20	345

## Components

### MOUNTING SET with trim 1 lamp

TYPE	COLOUR	Ø (MM)	ARTICLE NUMBER(S)
for intermediate ceilings	jet black	60	048-2896318



## Optional electrical accessories

### DIN RAIL POWER SUPPLY

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
160 W	72-90-63	005-6520210



### DIN RAIL LED DRIVER

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
DALI-2   200-1050 mA   2 x 42W	36-88-59	005-6121030

