


SASSO 40 round downlight


trimless

048-2800419M 048-2896117 002-90752

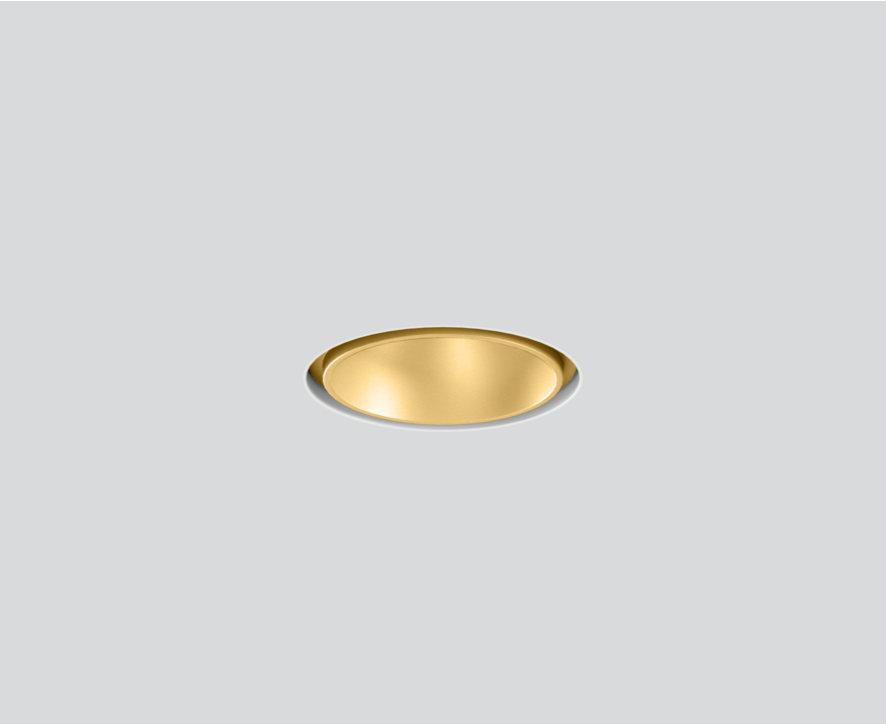


Round recessed spotlight in die-cast aluminium; surface gold; installation without tools in mounting set due to patented ball catch system; round installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 29° beam; UGR ≤ 13 ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 1500 cd/m²; degree of protection from below IP44 (from above IP20); PC2 220-240V; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

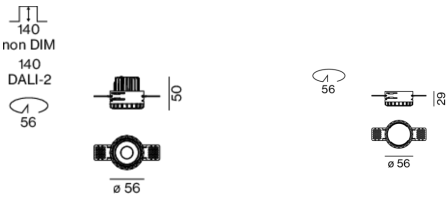

Project / Type	
Notes	
Count / Date	



General

Ceiling , Recessed
rotation 360°
gold , RAL260-M ¹
Mounting set traffic white
front IP44 , back IP20
299 lm

LED

2700 K
CRI ≥ 90
L85 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 99 , R _f : 91 , R ₍₁₋₁₅₎ : 89
MR 0.54
MDER 0.49

Optical

medium
beam angle 29°
UGR < 13 , $\geq 65^\circ$ <1500 cd/m ²
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical

non DIM
system 6.2 W
inset 5.1 W
12 Vf
450 mA
PC2 220-240V
system 48 lm/W ³
inset 58 lm/W ⁴

Physical

trimless
diameter 56 mm
height 50 mm
0.61 kg

Cutout

diameter 56 mm
recessed depth 140 mm

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)
⁴ incl. optical losses

Installation instructions



Lighting calculator

