

FRAME 40 flex high lumen

trim system

042-012F037 006-4210010Z 042-7002017



Project / Type

Notes

Count / Date



General

Ceiling , Recessed
traffic white , RAL 9016 ¹
IP20
1850 lm
1850 lm/m

LED

3000 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R_g: 99 , R_r: 91 , R_{t(1-15)}: 89
MR 0.61
MDER 0.55

Optical

Microprismatic
microprismatic
PstLM $\leq 1.0^2$ ³
SVM $\leq 0.4^2$ ³

Electrical

DALI-2
220-240 V
system 18.5 W
system 100 lm/W⁴
PC1
18 W/m

Physical

trim
length 1000 mm
width 55 mm
height 60 mm
5.5 kg
L (mm): 500 - 1000, breakable every 62.5mm

Cutout

length 1010 mm
width 45 mm
min. ceiling thickness 8 mm
max. ceiling thickness 25 mm
recessed depth 100 mm

¹ RAL code ² 1000mm

³ Value of containing product at full load (undimmed)

⁴ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.


Installation instructions




Lighting calculator



Light distribution



Product drawing

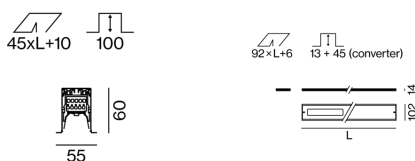

[042-012F037 006-4210010Z 042-7002017] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

04.04.2025