

MINO 40 high lumen

ceiling / suspended system


042-0124037 006-4220010Z 042-100401X



Project / Type

Notes

Count / Date

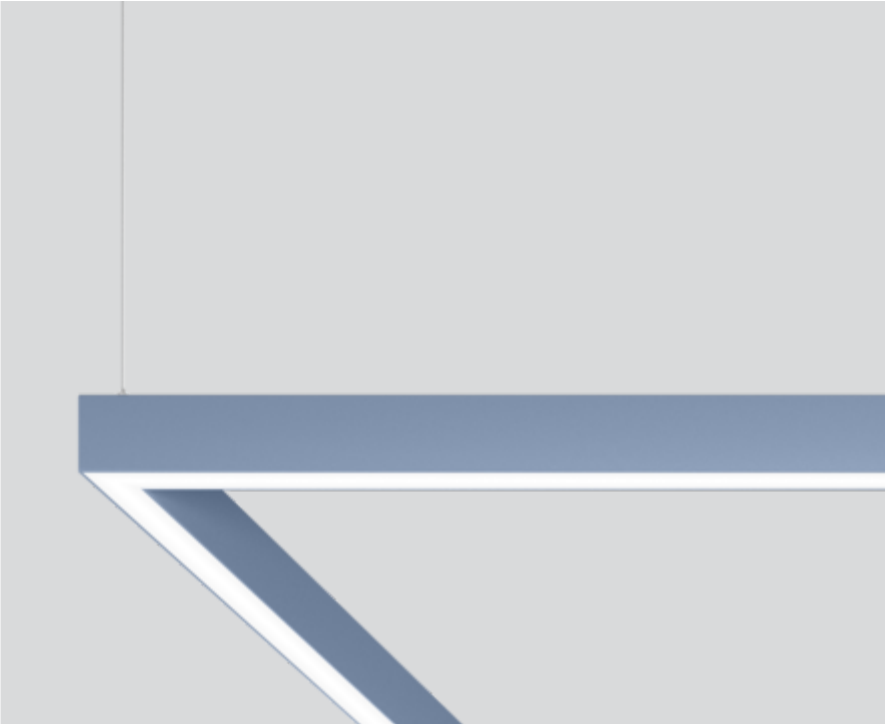

General

Ceiling , Suspended

special colours

IP20

3700 lm

1850 lm/m

LED

3000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 99 , R_r: 91 , R_{t(1-15)}: 89

MR 0.61

MDER 0.55

Optical

Microprismatic

microprismatic

PstLM ≤ 1.0 ¹

SVM ≤ 0.4 ¹

Electrical

DALI-2

220-240 V

system 36 W

system 103 lm/W²

PC1

18 W/m

Physical

length 2000 mm


width 40 mm

height 65 mm

3 kg

¹ Value of containing product at full load (undimmed)
² incl. consideration of optical losses, internal control unit losses & operating device efficiency

Light distribution



Product drawing



Installation instructions



Lighting calculator

