

# SASSO 60 square wallwasher/floor

ceiling


048-36109311W



Project / Type

Notes

Count / Date

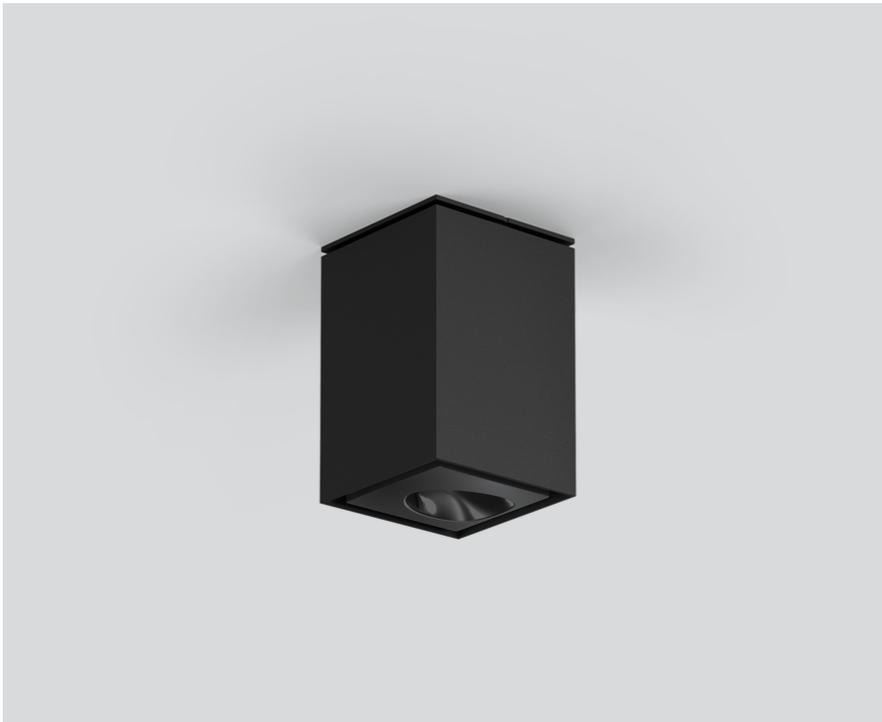

## General

Ceiling , Surface

black , RAL 9005 <sup>1</sup>

Inner colour black

IP20

992 lm

## LED

2700 K

CRI  $\geq$  90

L85 / 50000 h

initial MacAdam  $\leq$  3 SDCM

R<sub>g</sub>: 101 , R<sub>f</sub>: 90 , R<sub>f(1-15)</sub>: 88

MR 0.51

MDER 0.46

## Optical

wallwasher floor

P<sub>stLM</sub>  $\leq$  1.0 <sup>2</sup>

SVM  $\leq$  0.4 <sup>2</sup>

## Electrical

DALI-2

220-240 V

system 10.4 W

system 95 lm/W<sup>3</sup>

PC1

## Physical

length 72 mm


width 72 mm

height 108 mm

0.5 kg

Square ceiling mounted spotlight made of aluminium; surface black powder coated; Inner colour lacquered in black; luminaire housing can be attached to mounting plate without tools by interlock; passive cooling of the LEDs through improved heat sink geometry; no multiple shadows; light colour 2700 K; binning initial MacAdam  $\leq$  3 SDCM; CRI  $\geq$  90; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; degree of protection IP20; PC1; 220-240 V; incl. DALI-2 converter; flicker-free visual comfort through analogue current control (minimum value 1%); converter integrated into spotlight head; luminaire for through wiring; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing



<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

<sup>3</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

## Installation instructions



## Lighting calculator

