

# SASSO 60 base square downlight 1 lamp


ceiling  
048-30302174S



Project / Type \_\_\_\_\_


Notes \_\_\_\_\_

Count / Date \_\_\_\_\_

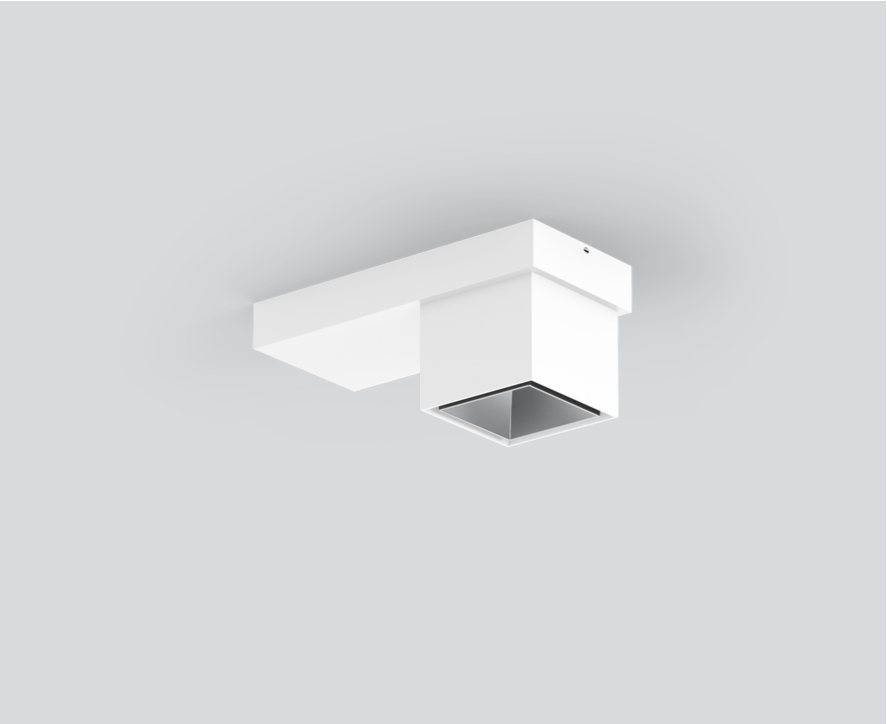


Surface mounted spotlight made of aluminium; 1 lamp; square spotlight head; surface white powder coated; Inner colour lacquered in matt silver; surface mounted housing in aluminium incl. converter; mounting plate with pre-assembled converter unit can be pre-mounted; luminaire housing can be attached without tools by interlock; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3500 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with  $15^\circ$  beam; UGR  $\leq 16$ ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above  $65^\circ \leq 1500 \text{ cd/m}^2$ ; degree of protection IP20; PC1; 220-240 V; incl. converter, non dimmable; luminaire for through wiring; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing



## General

Ceiling , Surface  
white , RAL 9016 <sup>1</sup>  
Inner colour matt silver  
IP20  
792 lm

## LED

3500 K  
CRI  $\geq 90$   
initial MacAdam  $\leq 2$  SDCM  
R<sub>g</sub>: 99 , R<sub>f</sub>: 90 , R<sub>(1-15)</sub>: 89  
MR 0.7  
MDER 0.64

## Optical

spot  
beam angle  $15^\circ$   
UGR  $\leq 16$  ,  $\geq 65^\circ < 1500 \text{ cd/m}^2$   
PstLM  $\leq 1.0$  <sup>2</sup>  
SVM  $\leq 0.4$  <sup>2</sup>

## Electrical

non DIM  
220-240 V  
system 10.4 W  
system 76 lm/W<sup>3</sup>  
PC1

## Physical

length 180 mm  
width 80 mm  
height 81 mm  
0.5 kg

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. consideration of optical losses, internal control unit losses  
& operating device efficiency

## Installation instructions



## Lighting calculator



**SASSO 60 base** square  
downlight 1 lamp  
ceiling  
048-30302174S



Project / Type

Notes

Count / Date

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	39
B13	63
B16	79
C10	63
C13	101
C16	126

