

SASSO 60 square downlight

semi-recessed


048-3001117S 002-90790



Project / Type _____

Notes _____

Count / Date _____

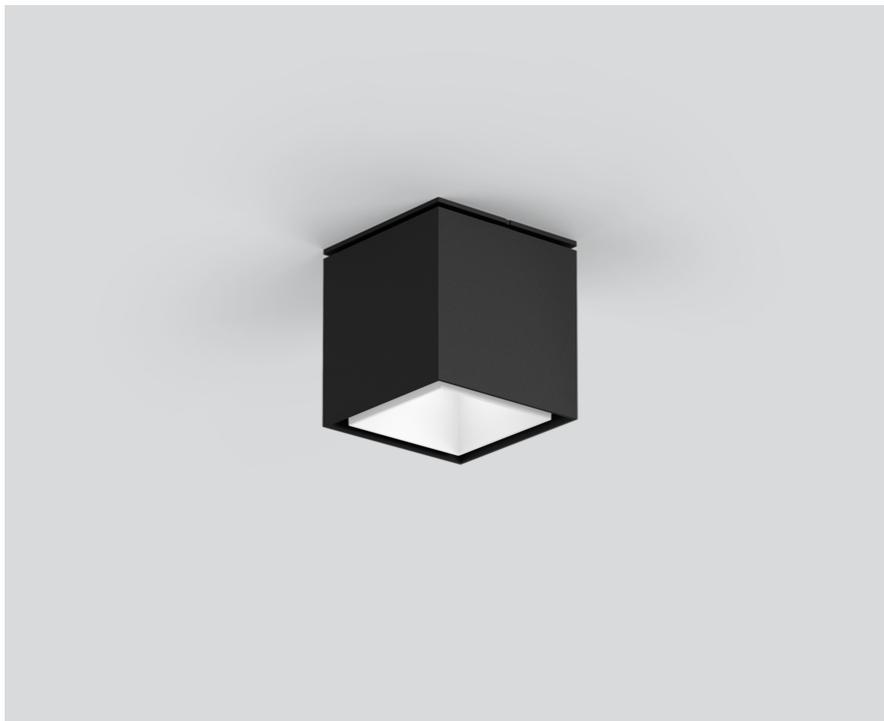

General

Ceiling , Semi-Recessed
 black , RAL 9005 ¹
 Inner colour white
 front IP40 , back IP20
 962 lm
 fixture 89 lm/W²

LED

4000 K
 CRI ≥ 90
 initial MacAdam ≤ 2 SDCM
 R_g: 98 , R_r: 90 , R_{t(1-15)}: 88
 MR 0.8
 MDER 0.72

Optical

spot
 beam angle 15°
 UGR < 19
 PstLM ≤ 1.0 ³
 SVM ≤ 0.4 ³

Electrical

DALI-2
 220-240 V
 system 12.8 W
 fixture 10.9 W
 36 Vf
 300 mA
 PC2
 1 DALI Addr.

Physical

length 72 mm
 width 72 mm
 height 75 mm
 0.52 kg


Cutout

diameter 60 mm
 recessed depth 120 mm


¹ RAL code
² FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.
³ Value of containing product at full load (undimmed)

Square semi-recessed spotlight made of aluminium; surface black powder coated; Inner colour lacquered in white; luminaire housing can be attached to mounting plate without tools by interlock; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 15° beam; UGR ≤ 19; degree of protection IP40; PC2; 220-240 V; incl. DALI-2 converter; flicker-free visual comfort through analogue current control (minimum value 1%); external converter for ceiling insertion, through-wiring suitable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



Installation instructions



Lighting calculator



SASSO 60 square downlight

semi-recessed

048-3001117S 002-90790



Project / Type _____

Notes _____

Count / Date _____

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	72
B16	115
C10	106
C16	170

Components

POWER SUPPLY

ARTICLE NUMBER(S)
002-90790

Optional electrical accessories

DIN RAIL POWER SUPPLY

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
160 W	72-90-63	005-6520210



DIN RAIL LED DRIVER

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
DALI-2 200-1050 mA 2 x 42W	36-88-59	005-6121030

